


# pfSense - Network wiring



1

## Rj45 cable

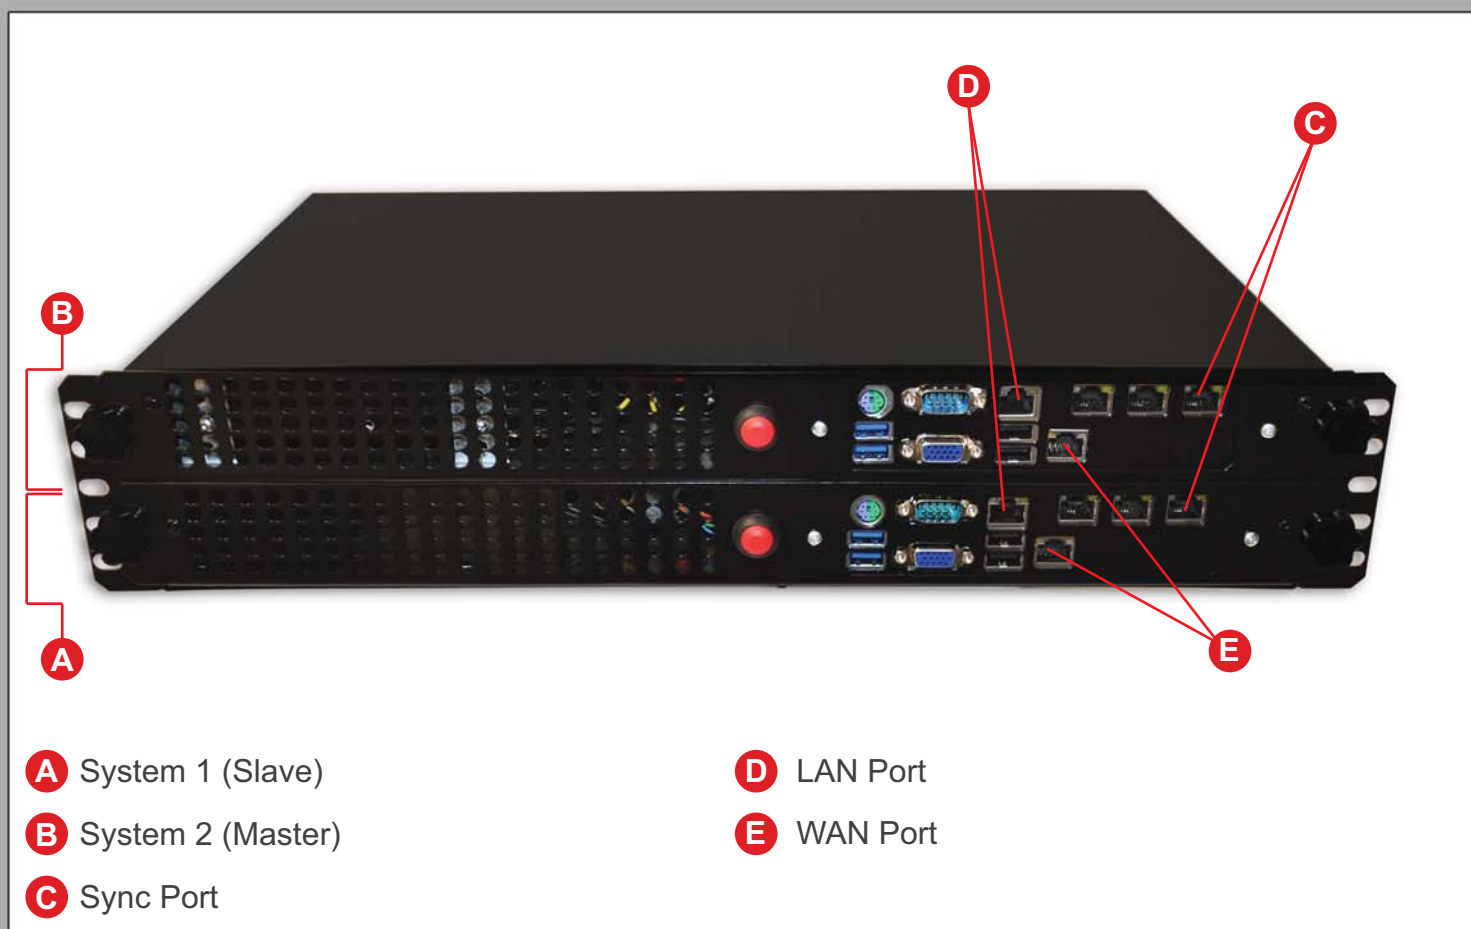

Insert the Rj45 cable to sync two drawers.

2

## LAN and WAN cables



Connect to the switch 2 LAN cables and 2 WAN cables, as needed

3

## Switch on

Turn on the **Master** System, and after 5-10 seconds turn on the **Slave** System.  
Two front labels identify the drawers.

# pfSense - How it is configured

System Firewall configured with CARP protocol:

## **Master**

WAN fisical address: 192.168.1.25

LAN fisical address: 192.168.0.25

Synch fisical address:192.168.222.2

## **Slave**

WAN fisical address: 192.168.1.26

LAN fisical address: 192.168.0.26

Synch fisical address:192.168.222.3

**WAN GW:** 192.168.1.1

## **Virtual IP – Gateway for LAN**

192.168.0.1

**User:** admin

**Password:** pfsense

**For web configuration and administration of the cluster go to the following address: <http://192.168.0.25>**